



SECTION A-A

	MATERIAL	SPECIFICATION	COLOR
CONDUCTOR	BC	$\phi 0.11/7C$	
INSULATOR	PP	$\phi 0.95$ mm	BK/RD/GR/YL
JACKET	PVC	$2.4 \times 4.8 \pm 0.2$ mm	BLACK

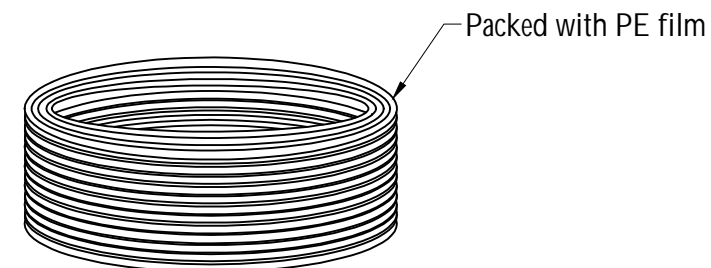

500M/R

1. Rated temperature: $-25^{\circ}\text{C} \sim 75^{\circ}\text{C}$
2. Rated voltage: DC 150V MAX
3. Insulation resistance: $\geq 100\text{M}\Omega$
4. Rated current: 0.5A

				DESCRIPTION	FINISHED PRODUCT'S FIGURE	SCALE	1 / 1	UNITS: MM	3RD ANGLE
				MODEL NO.	TEL-0032-500/BK		C28AWG-4/BK/500M/ROHS		
APPROVED	CHECKED	DRAWING	DESIGNED	DRAWING NO.					
				FINISHING			2018-12-14	A0	
				MATERIAL		SYM	DATE	REVISION	